


Mr. Contractor: Water Pressure Regulators should be installed when supply pressure exceeds 60 psi. The only accurate way to determine the supply pressure in a building is to test the pressure on the premises. Watts 276H300 Test Gauge offers a quick and simple way to test water pressure.

Watts Model 276H300 WATER PRESSURE TEST GAUGE

Hose Connection Gauge for testing
water supply pressure in a building
with high pressure indicator hand

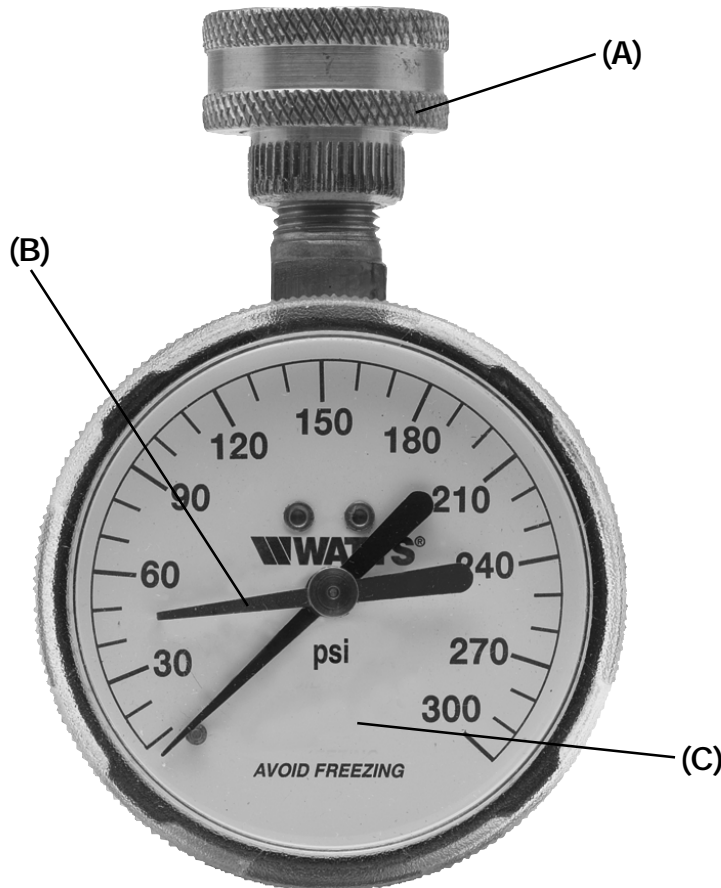

(A)

$\frac{3}{4}$ " Hose Connection which easily attaches to an outside hose bibb or to the drain connection on a water heater.

(B)

A Red indicator hand that "HOLDS" at the highest reading registered, to record shock pressure or when left on overnight will register the highest surge pressure which occurred during that period.

(C)

Features a large (2 $\frac{1}{2}$ ") face for easy reading.

CALIFORNIA PROPOSITION 65 WARNING

WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. (Installer: California law requires that this warning be given to the consumer.)

For more information: www.wattsind.com/prop65

A LEADER IN VALVE TECHNOLOGY

Since 1874 Watts Industries, Inc.
Water Products Division • Safety & Control Valves

USA: 815 Chestnut St., No. Andover, MA 01845-6098; www.wattsreg.com
Canada: 5435 North Service Rd., Burlington, ONT. L7L 5H7; www.wattscca.com

ISO 9001
CERTIFIED