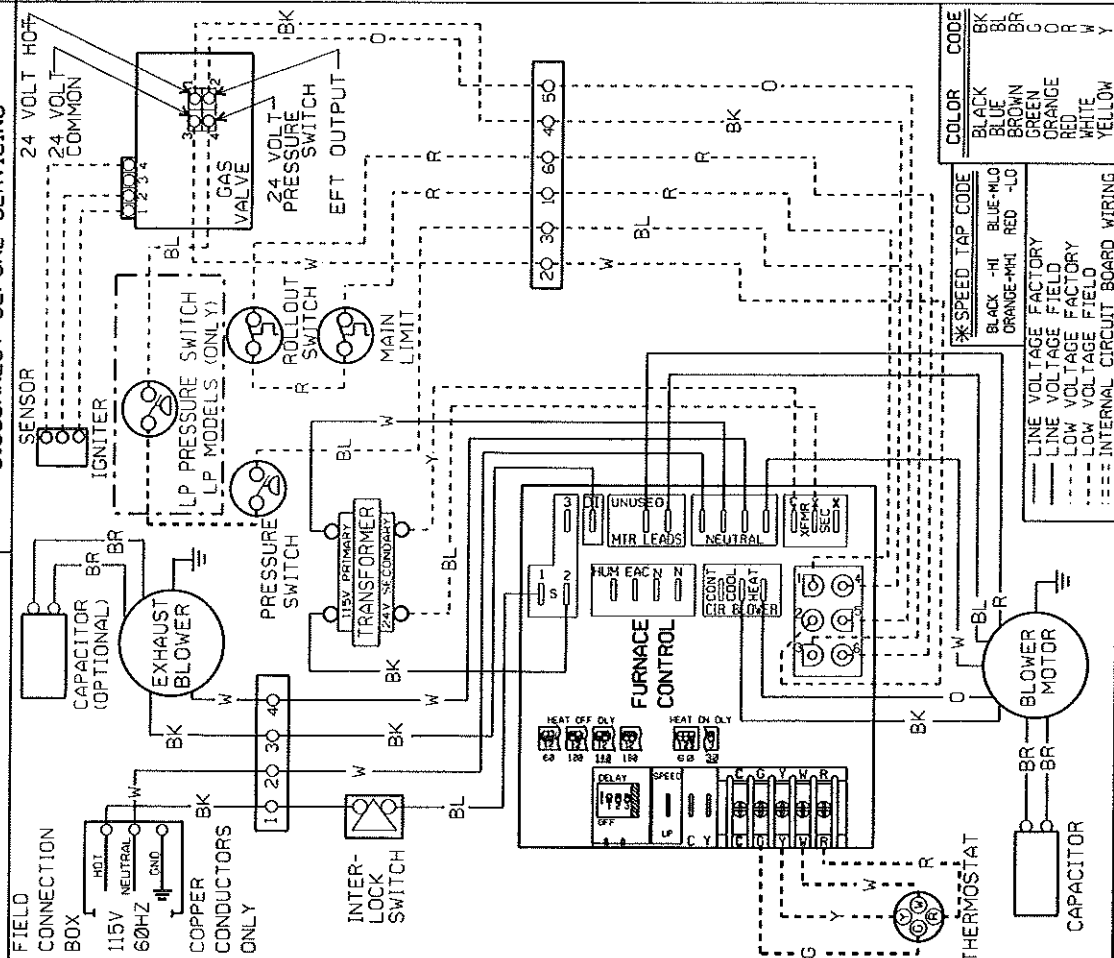


CONNECTION DIAGRAM

DANGER: ELECTRICAL SHOCK HAZARD
DISCONNECT BEFORE SERVICING

FAN CONTROL MODULE

COOL ON DELAY: 30 SEC.
COOL OFF DELAY: 30 SEC.

HEAT OFF DELAY:



60 SEC



100 SEC



142 SEC



182 SEC

HEAT ON DELAY:



60 SEC




30 SEC

EAC - F.W.: 2.8 A MAX. COMBINED

FIELD TWINNING CONNECTIONS ARE ON EDGE OF CIRCUIT BOARD. USE TWINNING KIT NAB003WK01. MATCH Z1 AND Z2 CONNECTIONS TO SAME POINTS ON 2ND FURNACE CONTROL. ADD LOW VOLTAGE WIRING AND RELAY PER TWINNING KIT INSTRUCTION MANUAL.

LADDER DIAGRAM

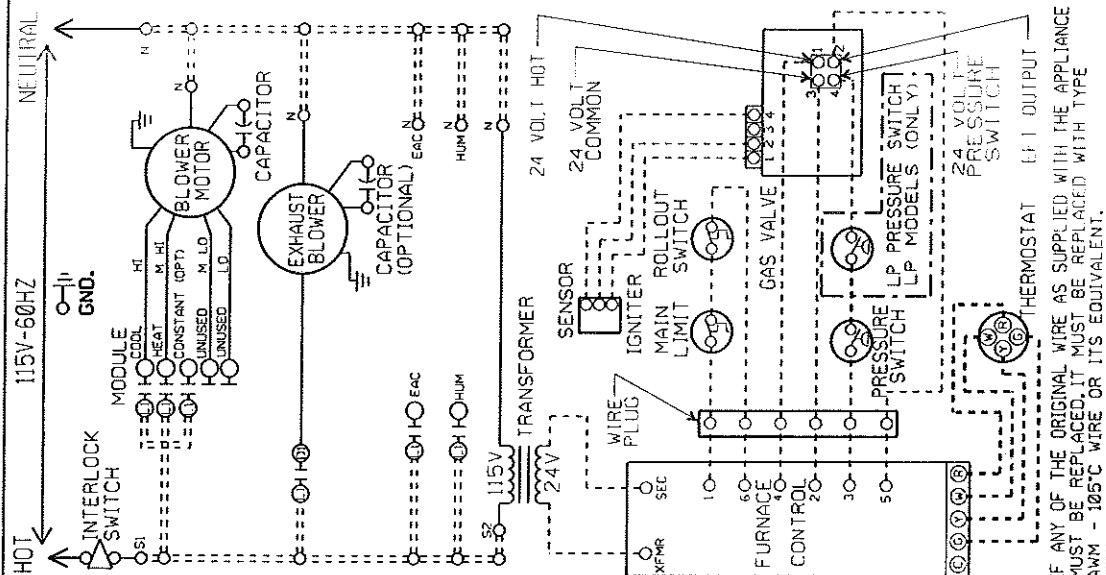

1010620